510-RICR-00-00-4

TITLE 510 - BUILDING CODE COMMISSION

CHAPTER 00 - N/A

SUBCHAPTER 00 - N/A

PART 4 - RISBC-4 Rhode Island Mechanical Code

4.1 Authority

The Rhode Island Mechanical Code is promulgated by the Building Code Standards Committee pursuant to the authority granted in R.I. Gen. Laws §§ 23-27.3-100.1.5 and 23.27.3-109.1.

The Building Code Standards Committee, in accordance with the rulemaking authority of R.I. Gen. Laws §§ 23-27.3-109.3(a) through (c) inclusive, has formally adopted and promulgated as the Rhode Island State Building Code, the provisions of the International Mechanical Code, 2018 edition, as published by the International Code Council, Inc. (ICC), together with amendments thereto hereinafter set forth to the articles and sections of this code:

4.2 Incorporated Materials

- A The Building Code Standards Committee hereby adopts and incorporates as the Rhode Island Mechanical Code the provisions of the International Mechanical Code (IMC), 2021 edition, as published by the International Code Council, Inc. (ICC) not including any further editions or amendments thereof and only to the extent that the provisions therein are not inconsistent with R.I. Gen. Laws Chapter 23-27.3 and any provisions reserved, deleted, or amended in this Regulation. The provisions of R.I. Gen. Laws Chapter 23-27.3 establishing administration and enforcement are hereby incorporated by reference. § 4.3 of this Part (Chapter 1) immediately follows and is supplemental to the General Laws. Editorial Note: Code users please note:
 - When purchasing or using the International Mechanical Code <u>2018</u>, please take note of the particular printing edition. Errata to that printing edition is available online directly at no charge at www.iccsafe.org/cs/codes/pages/errata.aspx or call the office of the State Building Code Commissioner at <u>401-889-5550</u> for further information.
 - Printed copies of the administrative and enforcement provisions of R.I.
 Gen. Laws Chapter 23-27.3 are available at the Office of the State
 Building Code Commission or online at
 http://www.rilin.state.ri.us/Statutes/TITLE23/23-27.3/INDEX.HTM.

1

- 31. The International Mechanical Code, 2018 Edition IMC 2021, is protected by the copyright that has been issued to the ICC. IMC 2021 can be viewed and purchased here: https://codes.iccsafe.org/codes/i-codes/2021-icodes. As a result, the State Building Code is not available in complete form to the public in an electronic format. The International Mechanical Code 2018 edition that is referred to within is contained in a printed volume and is also in an electronic format that have been published by the ICC under an exclusive license.
- 2. To properly utilize the Rhode Island Mechanical Code, IMC 2021 must be read jointly with the Building Code requirements in R.I. Gen. Laws Chapter 23-27.3 and the amendments to IMC 2021 set forth in the sections of this Regulation, below.
- 3. Format: These code changes follow numbering sequence and topics of the IMC 2021 (first printing). All provisions of IMC 2021 are retained unless indicated as deleted or amended. Published errata are available from the ICC website.

4.3 IMC 2021 is Adopted with the Following Amendments

Chapter 1: Scope and Administration

Chapter 1 is adopted with the following changes.

101.1	_Delete IMC section 101.1, Title, and substitute the following:
	_101.1 Title.
	This part shall be known as Rhode Island Mechanical Code Regulation (SBC-4 2021), hereafter referred to as "this code".


101.2 Delete IMC section 101.2 and substitute the following:

R101.2 Scope.

The provisions of this code shall apply to the installation, alterations, repairs, and replacement of mechanical systems, including equipment, appliances, fixtures, fittings, and/or appurtenances, including ventilation, heating, cooling, air conditioning and refrigeration systems, incinerators, and other energy related systems.

102.8 Add the following new to the end of section 102.81.1.1 "Referenced Codes and Standards":

<u>101.1.1 Referenced Rhode Island Codes References added to section 102.8.</u>

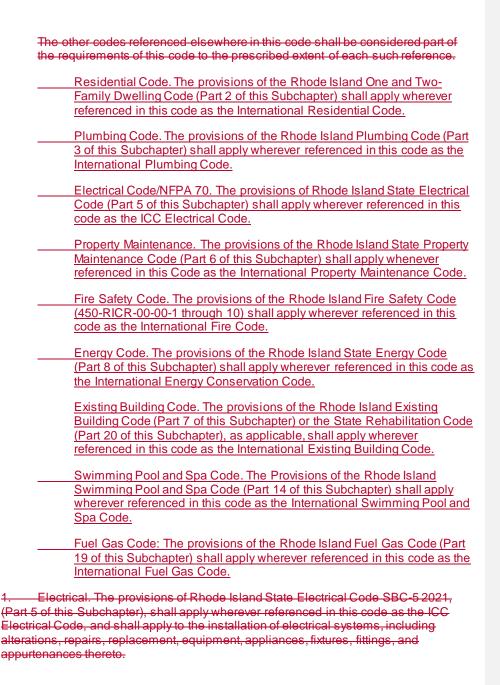

2. Clind Eld 1937 (1934) blanket er blat 1932 blat ill teinfre beide benede im et bei in at beinde still det bei beide benede bei beide be

Chapter 2 is adopted with no changes.

Chapter 3: General Regulations

Chapter 3 is adopted with the following changes.

307.2 Delete only 307.2 the Exception to IMC section 307.2 without substitution. - Deleted in Rhode Island.

307.3 Delete IMC section 307.3 without substitution. Deleted in Rhode Island.

Chapter 4: Ventilation

Chapter 4 is adopted with no changes.

4.5 Chapter 5: Exhaust Systems

Chapter 5 is adopted with the following changes.

504.9.5 Delete IMC section 504.9.5 and substitute the following:

504.89.5 Length Identification

____The maximum length of dryer duct may exceed thirty-five feet (35') when a permanent placard, measuring a minimum five inches (5") wide, three inches (3") high, and one eighth of one inch (1/8") thick, and constructed of either wood, metal, or rigid plastic, and bearing raised or embossed lettering stating the following: "WARNING: THE EFFECTIVE LENGTH OF THIS DRYER DUCT IS xxx FEET. ANY DRYER CONNECTED TO THIS EXHAUST DUCT MUST BE RATED TO USE AN EXHAUST DUCT OF THIS LENGTH, PER THE MANUFACTURERS SPECIFICATIONS; SEVERE RISK OF FIRE MAY RESULT FOR NONCOMPLIANCE WITH THIS NOTICE."

The provisions of table 504.69.4.1 shall be used in establishing the effective length of the ductwork installed and noted on the placard. The placard shall be permanently attached to the wall or floor within six inches (6") of the terminus of the duct.

4.6 Chapter 6: Duct Systems

Chapter 6 is adopted with no changes.

603.2 Duct sizing Delete and substitute the following:

Chapter 7 is adopted with no changes.

Chapter 8: Chimneys and Vents

Chapter 8 is adopted with no changes.

<u>Chapter 9: Specific Appliances, Fireplaces and Solid Fuel-Burning Equipment</u>

Chapter 9 is adopted with no changes.

4.7 Chapter 10: Boilers, Water Heaters and Pressure Vessels

Chapter 10 is adopted with the following changes.

1001.1 Add Exception #8 to IMC section 1001.1 as follows:

8. Permits for steam and water boiler installation and repairs of boilers over 200,000 BTUs for commercial uses and 400,000 BTUs for private residences or apartments shall be issued by the Rhode Island Department of Labor and Training, Division of Occupational Safety, Boiler Unit.

1003.1 General delete and substitute:

Chapter 11 is adopted with the following changes.

1101.4.1 Add the following new section 1101.4.1:

1101.4.1 "Prohibited Connections"

____The uses of potable water as an open loop, single pass heat exchange fluid for the refrigeration cycle of HVAC equipment is prohibited.

1105.3 Delete IMC section 1105.3 and substitute the following:

1105.3 Refrigerant detector:

_Machinery rooms shall contain a refrigerant detector with an audible and visual alarm. The detector, or a sampling tube that draws air to the detector, shall be located in an area where refrigerant from leak will concentrate. The alarm shall be actuated at value not greater than the corresponding TLV-TWA values shown for the refrigerant classification. Detectors and alarms shall be placed in approved locations.

Delete IMC section 1105.3 and substitute the following:

Chapter 12 is adopted with no changes.

Table 1202.4 Delete without substitution:

Chapter 13 is adopted with the following changes.

1301.2.1 Add the following new section 1301.2.1:

1301.2.1 Maximum inside fuel oil storage.

Where connected to a fuel-oil piping system, the maximum amount of fuel oil allowed inside any building shall be 1,320 gallons and the maximum amount of oil connected to any one (1) appliance shall be 660 gallons. Where the amount of fuel oil stored inside a building exceeds 1,320 gallons the storage area shall be in compliance with the R.I. Fire Prevention Safety Code_and the State Building Code_(Part 1 of this Subchapter).

1305.8 Add the following new section 1305.8:

1305.8 Fuel Oil Supply and Vent Piping:

Fill and vent lines for above ground fuel storage tanks shall be permitted to be a minimum of one and one quarter inch (1 1/4") in diameter for a single storage tank up to 500 gallon capacity.

Chapter 14: Solar Thermal Systems

Chapter 14 is adopted with no changes.

4.11 Chapter 15: Referenced Standards

Chapter 15 is adopted with the following changes.

Delete without substitution:

ASHRAE-2013- ASHRAE Fundamentals handbook- 603.2

4.124APPENDIX BAppendices to IMC 2021

The following Appendices are adopted: Appendix A.

All other appendices are deleted.

Delete APPENDIX B in its entirety.