510-RICR-00-00-5

TITLE 510 - BUILDING CODE COMMISSION

CHAPTER 00 - N/A

SUBCHAPTER 00 - N/A

PART 5 - RISBC-5-Rhode Island Electrical Code

5.1 Authority

The Rhode Island Electrical Code is promulgated by the Building Code Standards Committee pursuant to the authority granted in R.I. Gen. Laws §§ 23-27.3-100.1.5 and 23.27.3-109.1.

_The Building Code Standards Committee, in accordance with the rule making authority of R.I. Gen. Laws §§ 23-27.3-109.1(a) through (c) inclusive hereby adopts the provisions of the National Electrical Code, 2020 edition, as published by the National Fire Protection Association, as the Rhode Island State Electrical Code, together with the amendments thereto hereinafter set forth to the chapters and sections of said code.

5.2 Incorporated Materials

- A. The Building Code Standards Committee hereby adopts and incorporates as the Rhode Is land Electrical Code the provisions of the National Electrical Code (NEC) 2023 edition, as published by the National Fire Protection Association (NFPA) not including any further editions or amendments thereof and only to the extent that the provisions therein are not inconsistent with R.I. Gen. Laws Chapter 23-27.3 and any provisions reserved, deleted, or amended in this Regulation. The Building Code Standards Committee, in accordance with the rule making authority of R.I. Gen. Laws §§ 23-27.3-109.1(a) through (c) inclusive, has formally adopted and promulgated as the Rhode Island State Electrical Code, the provisions of the National Electrical Code, 2020 edition, as published by the National Fire Protection Association (NFPA) together with amendments thereto hereinafter set forth to the articles and sections of this code:
- B. The provisions of R.I. Gen. Laws Chapter 23-27.3 establishing administration and enforcement are hereby incorporated by reference. § 5.3 of this Part (General) immediately follows and is supplemental to the General Laws. Editorial Note: Code us ers please note:
 - 1. When purchasing or using the NEC 2020 code, please take note of the particular printing edition. Errata to that printing edition is available online directly at no

- charge at www.necdirect.org or the office of the State Building Code Commissioner or call 401-889-5487 for further information.
- 31. The National Electrical Code, 2020 Edition, NEC 2023 is protected by the copyright that has been issued to NPFA. NEC 2023 can be viewed and purchased here: https://www.nfpa.org/codes-and-standards/7/0/70. As a result, the State Electrical Code is not available in complete form to the public in an electronic format. The National Electrical Code 2020 edition that is referred to within is contained in a printed volume and is also in an electronic format that have been published by NFPA under an exclusive license.
- To properly utilize the Rhode Island Electrical Code, NEC 2023 must be read
 jointly with the Building Code requirements in R.I. Gen. Laws Chapter 23-27.3
 and the amendments to NEC 2023 set forth in the sections of this Regulation,
 below.
- Format: These code changes follow numbering sequence and topics of the NEC 2023 (first printing). All provisions of NEC 2023 are retained unless indicated in this Regulation as deleted or amended. Published errata are available from the NFPA we bsite.

5.3 NEC 2023 is adopted with the Following Amendments

Article 90: Introduction General

Article 90 is adopted with the following changes.

Delete all references to NEC and substitute Rhode Island Electrical Code SBC-5-2021.


_Delete all reference to any other International Code (IBC, IRC, IMC, etc.) and refer to appropriate SBC regulations. (See Amendment 2701.6 of SBC 1 2021, (Part 1 of this Subchapter)

90.6 Delete NEC section 90.6 and substitute the following:

90.10 Add the following new Article 90.10:<u>section:</u>

90.10 Rhode Island Code References

Building Code. The provisions of the Rhode Island State Building Code (Part 1 of this Subchapter) shall apply wherever referenced in this code as the International Building Code.

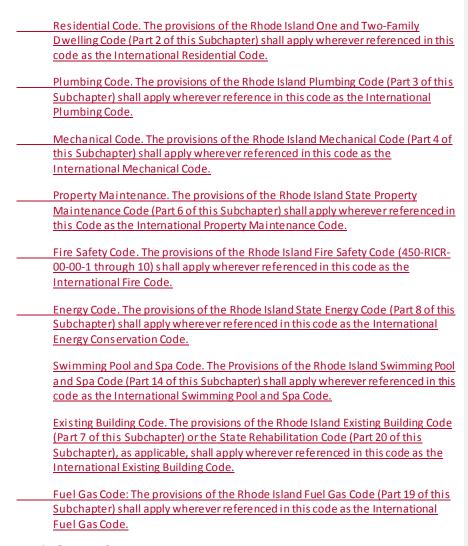

Chapter 1: General

Chapter 1 is adopted with no changes with the following changes.

Delete 110.14(D).

Chapter 2 is adopted with the following changes.

Revise section 210.25 as follows:

210.25 Branch Circuits in Buildings with More Than One Occupancy.

- a.A. Dwelling Unit Branch Circuits. Branch circuits in each dwelling unit shall supply only loads within that dwelling unit or loads associated only with that dwelling unit.
- bB. Common Area Branch Circuits. Branch circuits installed for the purpose of lighting, central alarm, signal, communications, or other purposes for public or common areas of a two (2) family dwelling, a multifamily dwelling, or a multi occupancy building shall not be supplied from equipment that supplies an individual dwelling unit or tenant space.
 - c-Exception: Smoke/CO Alarms in Common Area Branch Circuits of Existing Three-Family Dwellings.

Branch circuits installed for the purpose of associated smoke and carbon monoxide detection required for three (3) family dwellings located in the common areas of a three (3) family dwelling shall be permitted to be supplied from equipment that supplies an individual dwelling unit. Written documentation shall be supplied that there will be no interruption in service to said common area smoke and carbon monoxide devices.

Informational Note: See R.I. Gen. Laws § 23–28.1–2(b)(2)(i) and § 450 RICR 00–00–8.1.25 of the Rhode Island Fire Safety Code Section 8 of the Rhode Island Life Safety Code for requirements regarding the Installation of Smoke and Carbon Monoxide Alarms.

When the electric service to a three-family dwelling with branch circuits installed in accordance with section $210.25(\underbrace{\text{EB}}(1))$ is upgraded, or an electric meter is added for any other purpose, said property shall comply with sections 210.25-(A) and (B).

Substantiation: R.I. Gen. Laws § 23-28.1-2(b)(2)(i) has been adopted by the General Assembly. This statute directed the State Fire Board to provide reasonable standards for the installation of smoke and carbon monoxide devices in all existing three (3) family dwellings. The deadline for such installation was set to be on or before July 1, 2008. The Fire Safety Code Board of Appeal and Review then developed and implemented the above-referenced standards as § 450-RICR-00-00-8.1.25 of the Rhode Island Fire Safety Code Section 8 of the Rhode Island Life Safety Code. These further Regulations directed compliance with the State Building Code and both NFPA 72 and 720.

230.82- Revise Delete this NEC section 230.82 to read and substitute as follows:

230.82- Equipment Connected to the Supply Side of Service Disconnect.

Only equipment included in this section shall be permitted to be connected to the supply side of the service disconnecting means.

- a. Supply Side Equipment.
 - (1) Cable limiters or other current-limiting devices.
 - (2) Meters and meter sockets nominally rated not in excess of one thousand (1,000) volts provided all metal housings and service enclosures are grounded in accordance with Part VII and bonded in accordance with Part V of Article 250.
 - (3) Instrument transformers (current and voltage), impedance shunts, load management devices, surge a rresters, and Type 1 surge-protective devices.
 - (4) Taps used only to supply load management devices, circuits for standby power systems, fire pump equipment, and fire and sprinkler alarms, if provided with service equipment and installed in accordance with requirements for service-entrance conductors.
 - (5) Solar photovoltaic systems, fuel cell systems, or interconnected electric power production sources.
 - (6) Control circuits for power-operable service disconnecting means, if suitable overcurrent protection and disconnecting means are provided.
 - (7) Ground-fault protection systems or Type 2 surge protective devices, where installed as part of listed equipment, if suitable overcurrent protection and disconnecting means are provided.
 - (8) Connections used only to supply listed communications equipment under the exclusive control of the serving electric utility, if suitable overcurrent protection and disconnecting means are provided. For installations of equipment by the serving electric utility, a disconnecting means is not required if the supply is installed as part of a meter socket, such that access can only be gained with the meter removed.
- b. Meter Disconnect. A disconnecting means shall be permitted to be located a head of the service equipment provided the installation complies with sections 230.82(B)(1) through 230.82(B)(3). A separate service disconnecting means that complies with Part V of Article 230 shall be installed and shall be located as provided in section 230.70(A)(1).

- (1) Rating. A meter disconnect shall be capable of interrupting the load served. It shall have a short-circuit current rating not less than the available short-circuit current.
- (2) Marking. A meter disconnect shall be legibly field marked on its exterior in a manner suitable for the environment substantially as follows:

METER DISCONNECT NOT SERVICE EQUIPMENT

(3) Grounding. A meter disconnect shall be grounded in accordance with Part VII and bonded in accordance with Part V of Article 250. The grounding connections shall be permitted to be in accordance with section 250.142(A)(1).

Substantiation:

Chapter 3: Wiring Methods and Materials

Chapter 3 is adopted with no changes.

Chapter 4: Equipment for General Use

Chapter 4 is adopted with no changes.

Chapter 5: Special Occupancies

Chapter 5 is adopted with no changes.

Chapter 6: Special Equipment

Chapter 6 is adopted with no changes.

Chapter 7: Special Conditions

Chapter 7 is adopted with no changes.

Chapter 8: Communication Systems

Chapter 8 is adopted with no changes.

Chapter 9: Tables

Chapter 9 is adopted with no changes.

Informative Annexes to NEC 2023

The following Annexes are adopted for informational purposes only: A, B, C, D, F, G, I, J and K.

The following Annexes are deleted: E and H.